



佳恒冷氣工程有限公司

Kai Hang Air-Cond. Eng Co. Ltd


香港新界葵涌葵豐街41-45號安福工業大廈16樓H室
Block H, 16/F, On Fook Industrial Building,
41-45 Kwai Fung Crescent, Kwai Chung, N.T., Hong Kong
Fax: (852) 3171 7810 Phone: (852) 3171 7781, 3172 1073



修理門 ACCESS PANEL

Access panel provide easy installation wherever duct access is needed. It can be either hinged type or wholly removable. Other thickness and size are also available.


Iron
鐵

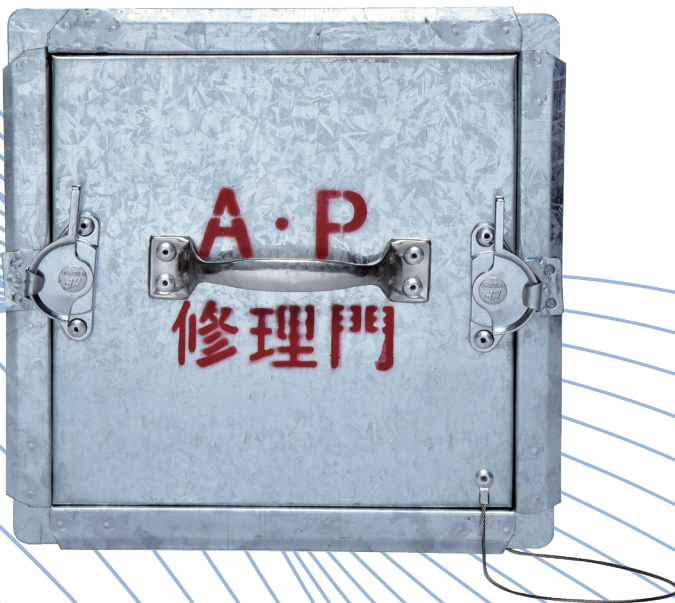

Stainless Steel
不銹鋼



修理門 ACCESS PANEL

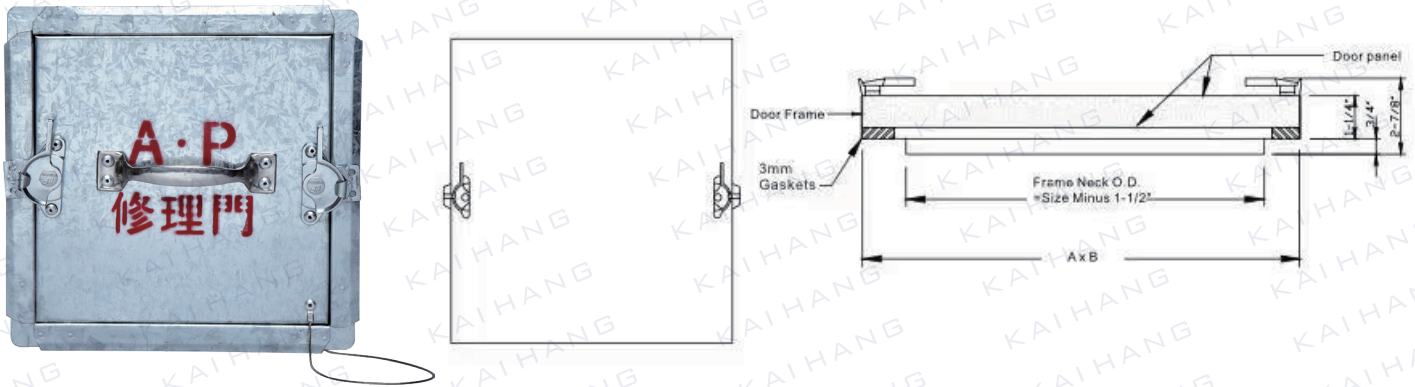

GALVANISED, 304 OR 316 STAINLESS STEEL ACCESS PANEL FEATURES

Access Panels — Galvanized, 304 & 316 Stainless Steel manufactures this high quality product for the air conditioning industry. Used as an easy resealable way of gaining access to rigid air conditioning ducts and conditioner housings for equipment maintenance and cleaning purposes. Equipment such as fire dampers, smoke and volume dampers, variable air volume units (VAV), duct heaters, coils and filters can be accessible for compliance with building code standards.

This product has been simply designed for ease of operation. Simply turn the 304 or 316 stainless steel sash cams provided on the panel to un-lock then remove from its frame.

FRAME: Made from press formed galvanized steel 0.8mm — 1.0mm or fabricated 304 or 316 stainless steel

PANEL: 2 piece press formed 0.6mm — 0.8mm galvanized steel or fabricated 304 or 316 stainless steel


FRAME: Made from press formed galvanized steel 0.8mm — 1.0mm or fabricated 304 or 316 stainless steel

PANEL: 2 piece press formed 0.6mm — 0.8mm galvanized steel or fabricated 304 or 316 stainless steel

SEAL: E Glass Fibre Rope



修理門 ACCESS PANEL

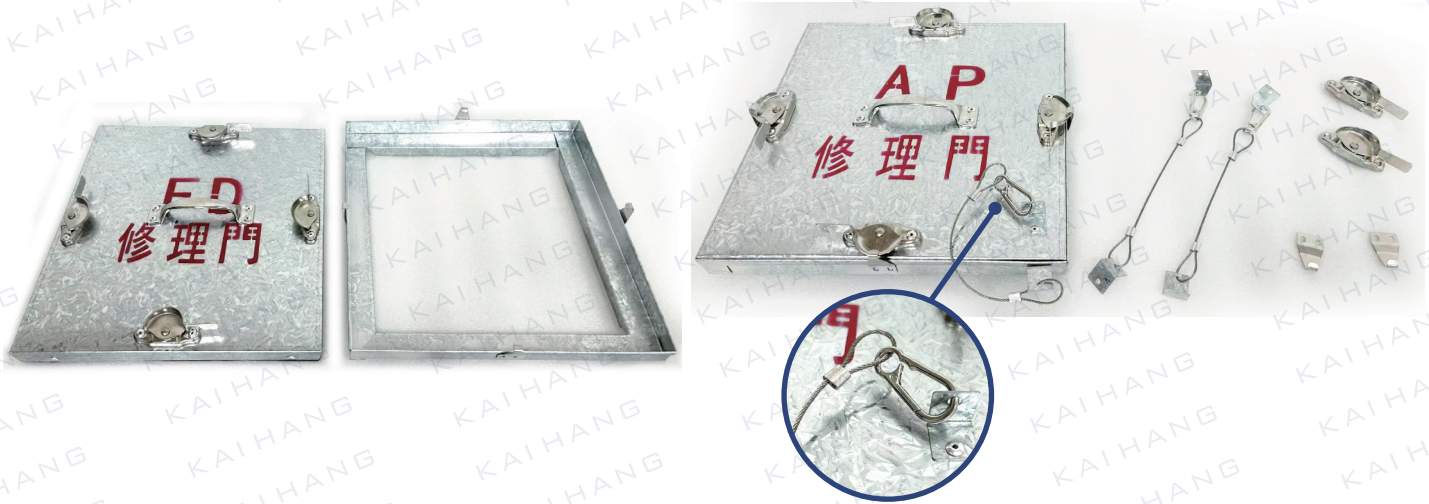

LOCKS: 2 or 4 galvanized steel or 304 or 316 stainless steel sash fasteners. Combining a specially designed hook and cam system to give an airtight seal between the panel and its frame

INSULATION: Thermal and acoustic 25mm fibreglass insulation is sealed airtight within the sandwich panel via the PVC seal

SEAL: E Glass Fibre Rope

LOCKS: 2 or 4 galvanized steel or 304 or 316 stainless steel sash fasteners. Combining a specially designed hook and cam system to give an airtight seal between the panel and its frame

INSULATION: Thermal and acoustic 25mm fibreglass insulation is sealed airtight within the sandwich panel via the PVC seal

Size	Dim. A Width	Dim. B Height	Frame Neck O.D.	No.of Camlock	No.of Handle
6 x 6	6"	6"	4-1/2" x 4-1/2"	2	1
8 x 8	8"	8"	6-1/2" x 6-1/2"	2	1
10 x 10	10"	10"	8-1/2" x 8-1/2"	2	1
12 x 12	12"	12"	10-1/2" x 10-1/2"	2	1
14 x 14	14"	14"	12-1/2" x 12-1/2"	2	1
16 x 16	16"	16"	14-1/2" x 14-1/2"	4	1
18 x 18	18"	18"	16-1/2" x 16-1/2"	4	1
20 x 20	20"	20"	18-1/2" x 18-1/2"	4	1
24 x 24	24"	24"	22-1/2" x 22-1/2"	4	2
24 x 36	24"	36"	22-1/2" x 34-1/2"	6	2